



Dox 25 M



Domix 45

Dox 25 - Domix 45

Water meter & mixer

Performances

- Water output:
From 15 to 25 l/min with 1 bar and 20°C
From 35 to 55 l/min with 5 bars and 20°C

Use

The **Dox-Domix** water meter & mixer range doses and mixes (except for the Dox 25) the precise quantity and hot and/or cold water temperature needed for the dough. The water temperature is measured and displayed directly on a monitor.

Operating principle

The water meter & mixers are connected to the main water, hot water and water cooler. Depending on the selected programme, they determine the quantity and ideal temperature of water needed for the recipe. The mix water is obtained using a thermostatic button.

Construction

- Electronic control
- Composite structure (4 / 5 mm thick)
- Dual layer stainless steel filter
- Back flow valve
- Power plug and jack for remote pump control
- Stainless steel delivering pipe
- Delivered with "S" pipe, 2.5m pipe and support
- Digital keyboard to set or call up memory, or water discharge
- Power supply : single phase 208 to 240 V, 50 Hz to 60 Hz (on Standard models)

Dox 25

- Display of quantity and temperature of water 1/10 of a degree Celsius

Dox 25 M

- Display of quantity and temperature of water 1/10 of a degree Celsius
- Temperature adjustment by means of a thermostatic button

Domix 45 A


- Domix 45 A : Bypass to drain the water that has not reached the desired temperature (draining the pipes, etc...)
- Digital display of ambient temperature and the external sensor (dough temperature) at 1/10 of a degree Celsius
- By-pass
- Temperature adjustment by means of a rotating button
- 80 mixing programs

The advantages


- Optimised management of the temperature and outflowing water quantity.
- Digital display of information
- Contributes to consistent dough mixing results
- Easy start-up

Machine complies with CE standard

Dox 25 - Dox 25 M - Domix 45 Water meter & mixer

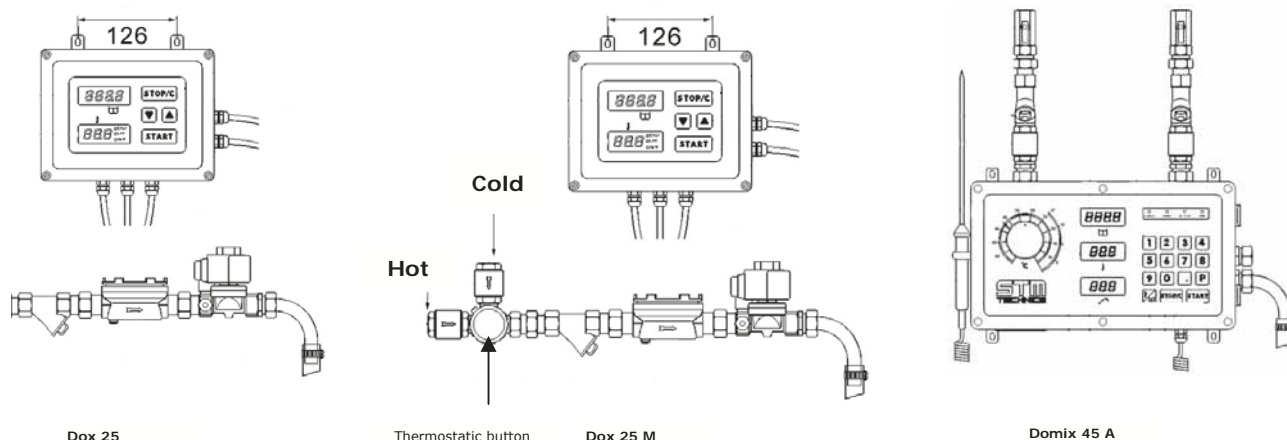

Water cooler and water meter & mixer connecting principle Do not connect the water supply on the water softener

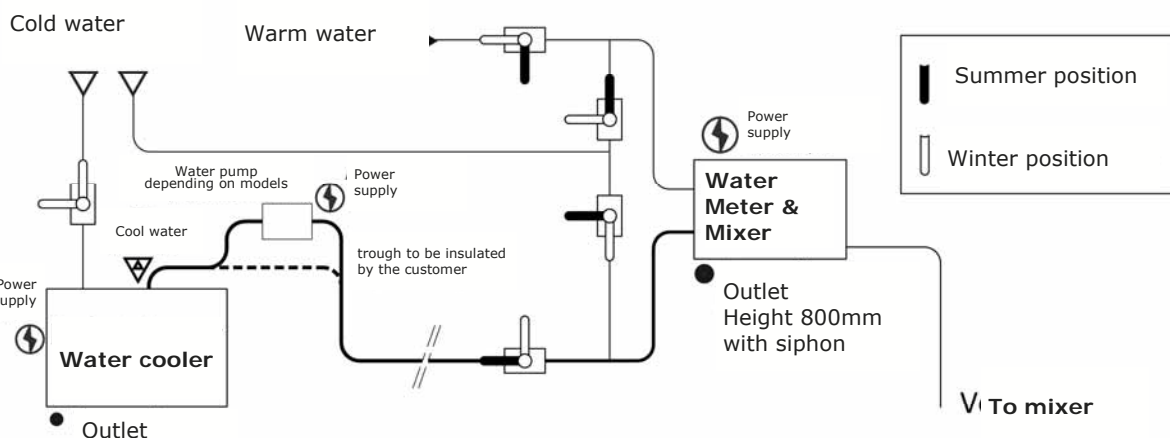

▲ The customer is responsible for all the connecting work and supply of shut-off valves

General features

Model	Dox 25	Dox 25 M	Domix 45 A
Reference	07055038	07055032	07055031
Metering function	yes	yes	yes
Mixing function	no	yes	yes *
Pump micro-switch	yes	yes	yes
Cold water inlet	yes	yes	yes
Hot water inlet	no	yes	yes
Water pressure required	0.5 - 5 bar	1 - 5 bar	1 - 5 bar
Net weight	8 kg	9 kg	13 kg
Water output with 1 bar and 20° C in litre/minute	25	15	18
Water output with 5 bars and 20° C in litre/minute	25	35	40
Power	25 W	25 W	25 W

* Electronic water mixing

Packing

	Model	Dox 25	Dox 25 M	Domix 45 A
Mainland (Cardboard box on pallet)	Width	500 mm	500 mm	600 mm
	Length	400 mm	400 mm	400 mm
	Height	300 mm	300 mm	300 mm
	Weight	10 kg	10 kg	15 kg
By Sea (Wooden Crate)	Model	Dox 25	Dox 25 M	Domix 45 A
	Width	540 mm	540 mm	640 mm
	Length	440 mm	440 mm	440 mm
	Height	340 mm	340 mm	340 mm
	Weight	12 kg	12 kg	17 kg