




4015B2

NEWTEC

the world leaders

model
4015B2

high performance combination weigher

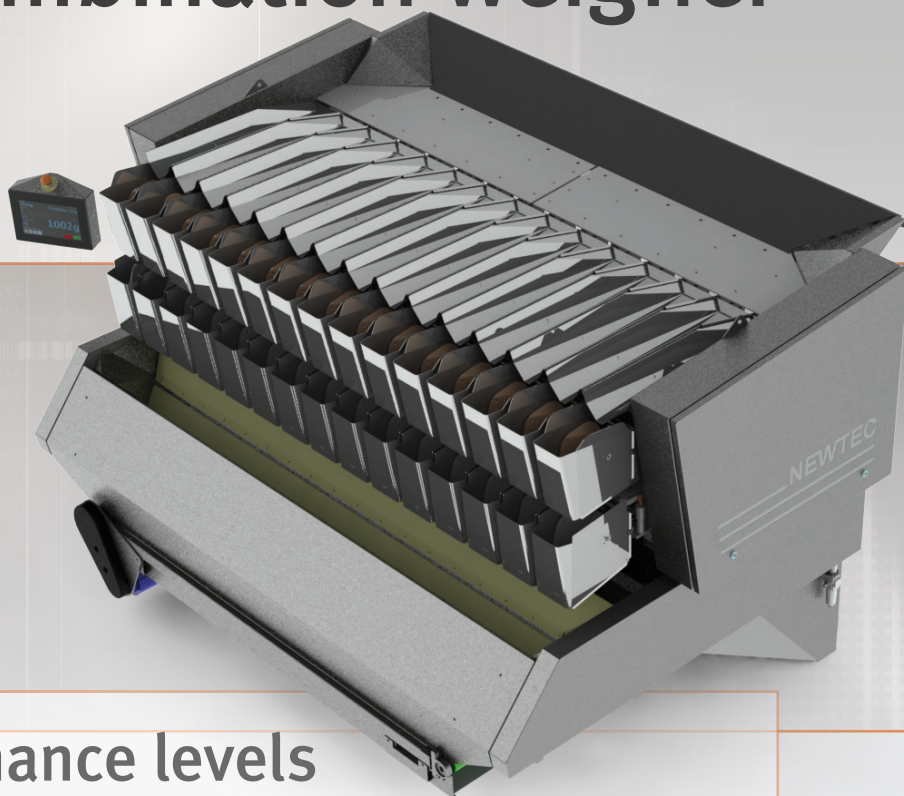

new performance levels for solid fruit and vegetables

For potatoes, onions, carrots and similar products

- Sturdy structure in stainless steel
- Detachable pans for simple cleaning and service
- Flexible to handle large as well as small products
- Products from \varnothing 20mm to \varnothing 120mm, and carrots up to 230mm long
- Provides maximum output per m²
- 500g packs up to 110 packs per minute
- 2.5kg packs up to 85 per minute
- Touch screen programming
- Reinforced weigh pan flaps ensuring low noise level.
- Compact control panel with touch control. Incredibly simple and user friendly control
- New infeed system which ensures good distribution of product in the machine
- VarioSpeed ensures optimum running – also when product fed irregularly

NEWTEC

the world leaders



model 4015B2

Technical Data

Air requirement:	Connection: 3/8" Min. pressure: 7 Bar (0,7 MPa) Consumption: 100 NI/min
Electrical requirement:	230/400 VAC +(N)+PE
Noise level:	79 dB(A)
Weight:	850kg (weigher only) 1170kg (combination as on picture)

Capacity

Portions per min up to	0,5Kg	1 Kg	2,5Kg	5Kg
Onions	110	95	85	55
Potatoes	110	95	85	55
Carrots	95	85	75	



NEWTEC A/S
Staermosegaardsvej 18
DK-5230 Odense M
Denmark

T: +45 66 15 84 44
F: +45 66 15 44 39

sales@newtec.com
www.newtec.com

User friendly touch screen programming

- switchable language options
- ethernet connection

